PLASSON® Livestock

Exhaust Fans

Galvanised Box Fan 54'
02382833

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency		60	Hz
Speed		585	RPM
Power consumption	Pe	1850	W
Nominal current	I	5.6/3.2	A
Maximum current	I	6.3/3.7	A
Capacitor	I	-	µF
Ambient temperature	Tamb min/max	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level at 2 m	Lp	74	dB(A)
Weight		78.3	kg

Approval(s)

CE

No.17399

Fan details

Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No
Intelligent Fan Drive	No

Wiring diagram - Fan

AB01 - CCW

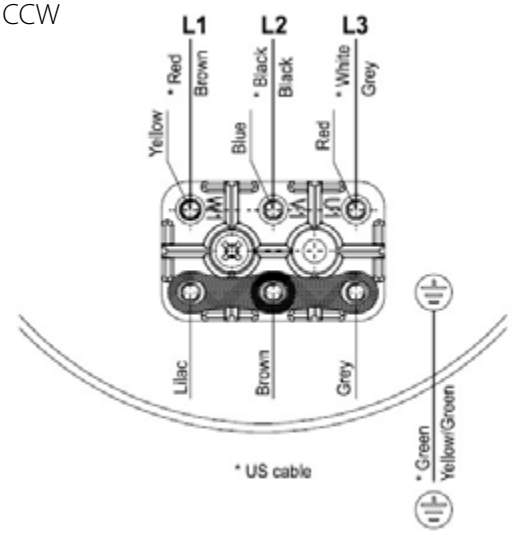

Dimensions

A01	1375 mm
A09	295 mm
A12	96 mm
A19	1480 mm
A20	1480 mm
A22	548 mm
A31	85 mm

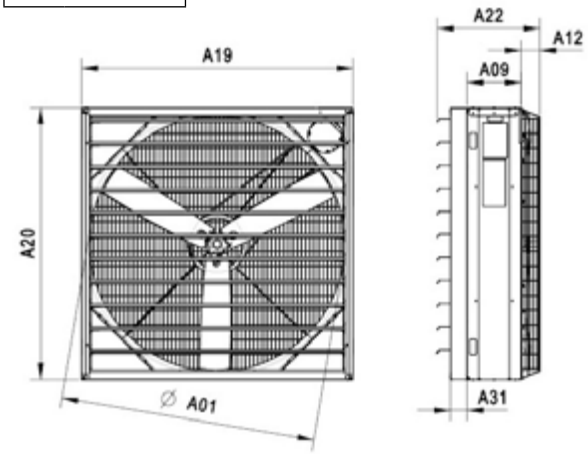

Characteristics

0 Pa 51100 m³/h

50 Pa 40700 m³/h

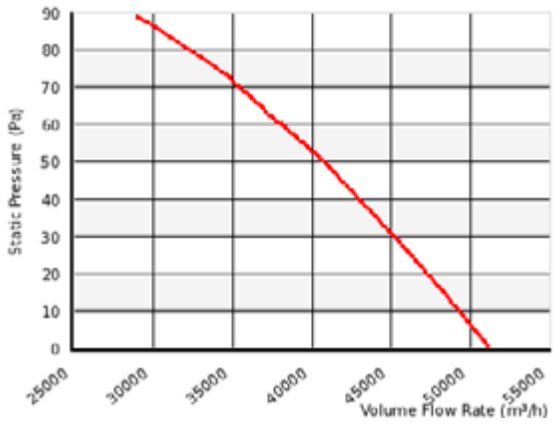

09/2017 MAXMARK

Feeding Drinking Climate Housing

Maagan Michael, D.N. Menashe, 3780500, Israel
Tel: +972-73-2413001, Fax: +972-73-2333711
info@plassonlivestock.com | www.plassonlivestock.com